

calorex®

CALOREX DH10 *portable dehumidifier*



Features

- High efficiency dehumidifier with ozone friendly refrigerant
- 11.3 lts/day @ 20°C/75%RH & 21 lts/day @ 32°C/80%RH
- Wide temperature and humidity range suitable for most applications
- Integral humidistat for automatic operation
- Robust castors for manoeuvrability
- Removable air filter
- 6 litre condensate container and 'container full' light
- Adaptor for continuous drainage
- Spare parts and service support available

PORTABLE DEHUMIDIFIER



Uses


- Homes
- Caravans
- Outbuildings
- Boats
- Offices
- Museums
- Archives
- Art Galleries

The Calorex DH10 is fitted with a fully automatic defrost system permitting efficient operation at low temperatures. The fully hermetic refrigeration system is charged with R290, a non ozone depleting refrigerant.

Performance

Condition	Moisture Removal
20°C/75%RH	11.3 lts/day
27°C/60%RH	10.5 lts/day
30°C/80%RH	20.6 lts/day
32°C/80%RH	21.0 lts/day

	UNIT	DH10
ELECTRICAL DATA		
	Volts/Hertz	230/50
MAXIMUM SUPPLY FUSE	Amps	13
AVERAGE POWER CONSUMED	Watts	370
MAXIMUM POWER CONSUMED	Watts	460
AIR FLOW	m ³ /hr	260
DIMENSIONS		
HEIGHT	mm	570
WIDTH	mm	300
DEPTH	mm	400
WEIGHT	kg	26
CONDENSATE CONTAINER CAPACITY	Litres	6
CONDENSATE HOSE LENGTH	m	2
CONDENSATE HOSE SIZE	mm O/D	13

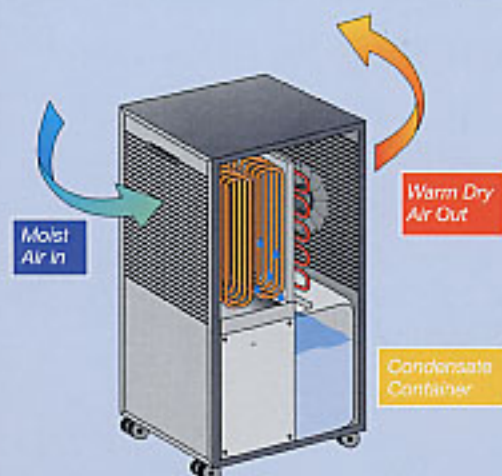

calorex®

HEAT PUMPS & DEHUMIDIFIERS

Calorex Heat Pumps Limited

The Causeway, Maldon, Essex CM9 5PU, England

Tel: +44 (0)1621 856611 Fax: +44 (0)1621 850871

Email: sales@calorex.com

Web: www.calorex.com