

COMMERCIAL/INDUSTRIAL

High performance mobile dehumidifier CALOREX DH 15

- General dehumidification and building drying
- Fully mobile
- Compact size
- Low temperature operation, down to 0°C




The Calorex DH15 has a wide range of applications:

- Basements/Cellars
- Paper stores
- Museums
- Store rooms
- Electrical sub-stations
- Unheated premises
- Sports halls
- Pump rooms
- Flood damage
- Building drying
- Art galleries
- Archives

calorex®

PERFORMANCE DATA

- General dehumidification and building drying
- Fully mobile-fitted with robust heavy duty castors
- Compact size, carrying handle
- Low temperature operation, down to 0°C
- Robust construction
- High efficiency compressor
- Can be transported easily
- 6 litre tank capacity
- Permanent drain facility
- Auto shut-off on full tank
- Ozone friendly refrigerant
- Built-in humidistat adjustable in range 20-80%.

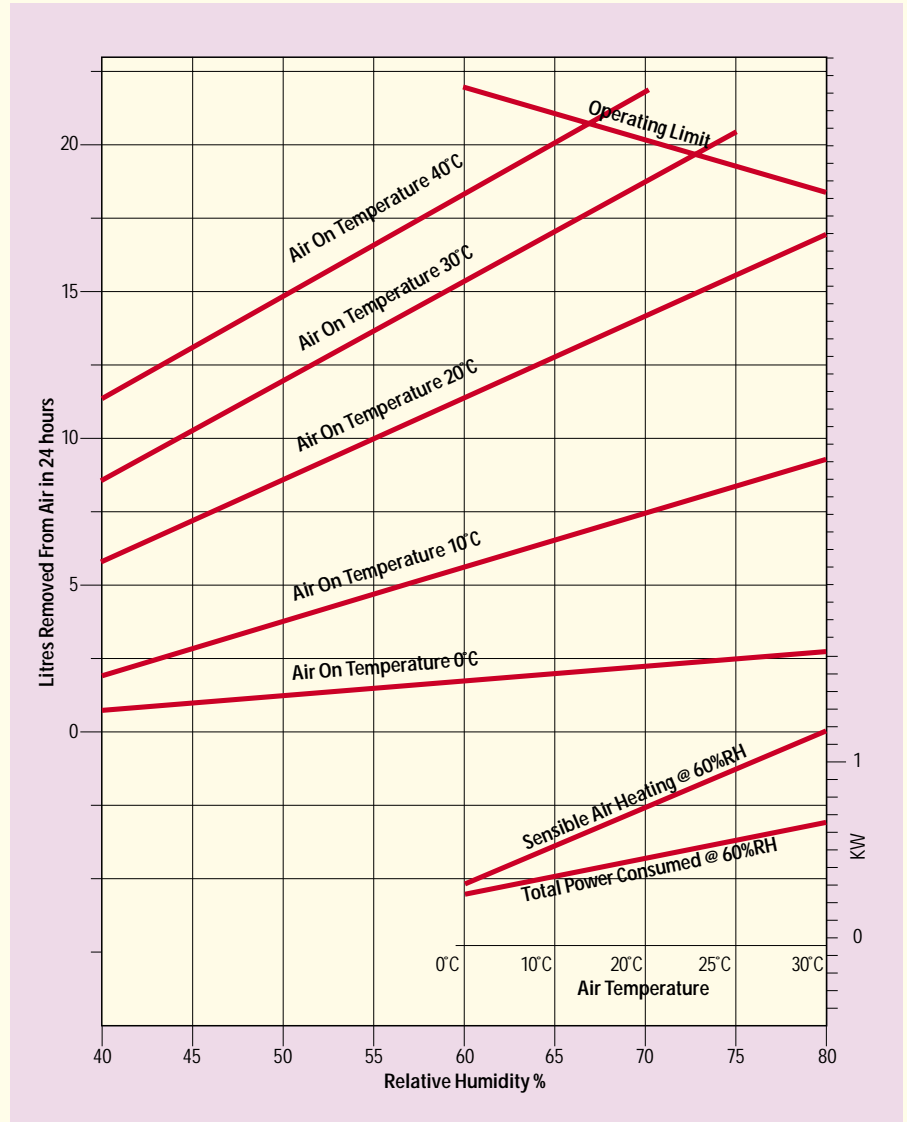

TECHNICAL DETAILS

DATA SHEET	UNIT	DH15AX
Electrical Data	V/Hz	230/50
FLA	Amps	3.8
Starting current	Amps	18
Maximum Supply Fuse	Amps	10
Average Power Consumed	W	430
Maximum Power Consumed	W	650
Air Flow	m ³ /hr	225
Sound Level	dbA	53
Dimensions		
Height	mm	570
Width	mm	355
Depth	mm	355
Weight	kg	30
Size of condensate tank	litre	6
Permanent drain connection	OD mm	9.5



CALOREX HEAT PUMPS LIMITED

The Causeway, Maldon, Essex, CM9 5PU United Kingdom

Tel No. +44(0)1621 856611 Fax No. +44(0)1621 850871

e.mail: sales@calorex.com web: www.calorex.com