

COMMERCIAL/INDUSTRIAL

# Wallmounted Dehumidifiers

## CALOREX OTW15



A wall-mounted, compact dehumidifier designed for humidity control in heated or unheated spaces


- Designed to fit above a standard doorway
- Fitted with tamper proof controls
- Integral humidistat
- Hot gas defrost
- Air filter

*Especially suitable for use in*

- Public buildings
- Stairwells
- Basements
- Changing rooms
- Cellars
- Museums
- Store rooms
- Unheated premises
- Garages

**calorex**<sup>®</sup>

## PERFORMANCE DATA

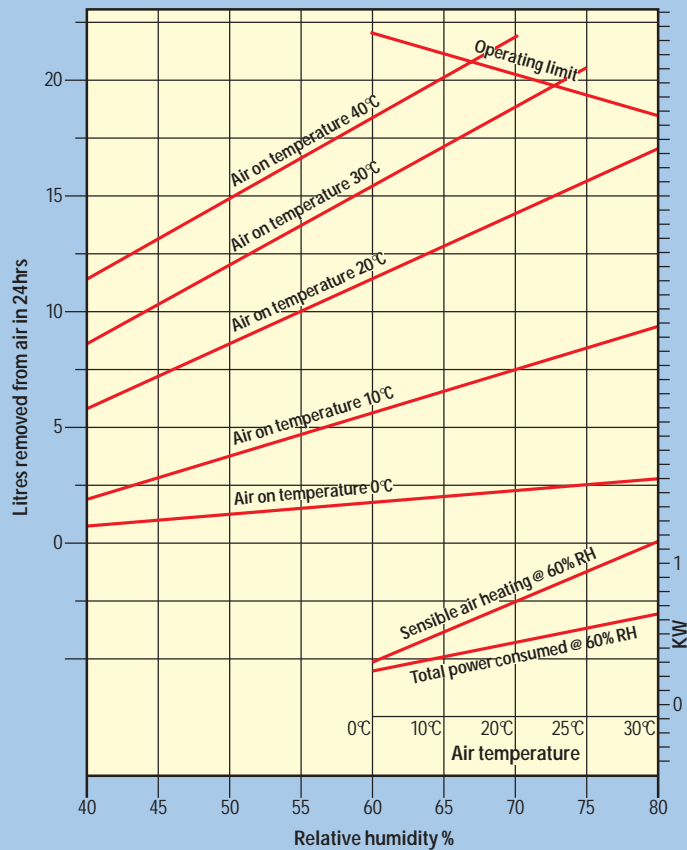

DATA	UNIT	OTW15AX
<b>ELECTRICAL DATA</b>	V/ph/Hz	230/1/50
FLA	Amps	3.8
Starting current	Amps	18
Maximum supply fuse	Amps	10
Average power consumed	W	430
Maximum power consumed	W	650
Air flow	m <sup>3</sup> /hr	225
Sound level	dB(A)	53
Refrigerant (R407C)	kg	0.4
<b>DIMENSIONS</b>		
Height	mm	320
Width	mm	817
Depth	mm	360
Weight	kg	35
Drain connection	OD mm	9.5

## OPTION

A through the wall version is also available.

# calorex®

CALOREX HEAT PUMPS LIMITED

The Causeway, Maldon, Essex, CM9 5PU United Kingdom

Tel No. +44(0)1621 856611 Fax No. +44(0)1621 850871

e.mail: sales@calorex.com web: www.calorex.com